

Dual cooling system

-86°C ULT freezer

-86°C Ultra Low Temperature Freezer built up by two independent refrigeration systems and the Dual Cooling System offers the highest level of protection, If you stop any compressor by disconnecting it the other can maintain the freezer around the -80°C. Valuable and irreplaceable samples can always be securely stored with the highest confidence even if the compressor fails.

1.4
°C

Temp.Uniformity

3.5
H

Pulling down to -80°C

7.1
Kwh

Daily consumption

*Typical freezer data based on internal testing with freezer setpoint at -80°C and ambient temperature at 25°C.

DW-HL578T

Features



Dual System
Two high-efficiency refrigeration systems



Touch screen
10"LCD touch screen



Extreme labor-saving
Ergonomic handle



Compressors
Two compressors



Vacuum insulation
VIP insulation foaming



Alarms system
12 kinds of alarm functions

Structure

Stainless steel shelf



Access port



Circuit breaker for electrical protection



Heavy duty casters with leveling feet



Card and finger print access



Insulated inner doors





Ergonomic design handle



Heated vacuum relief port



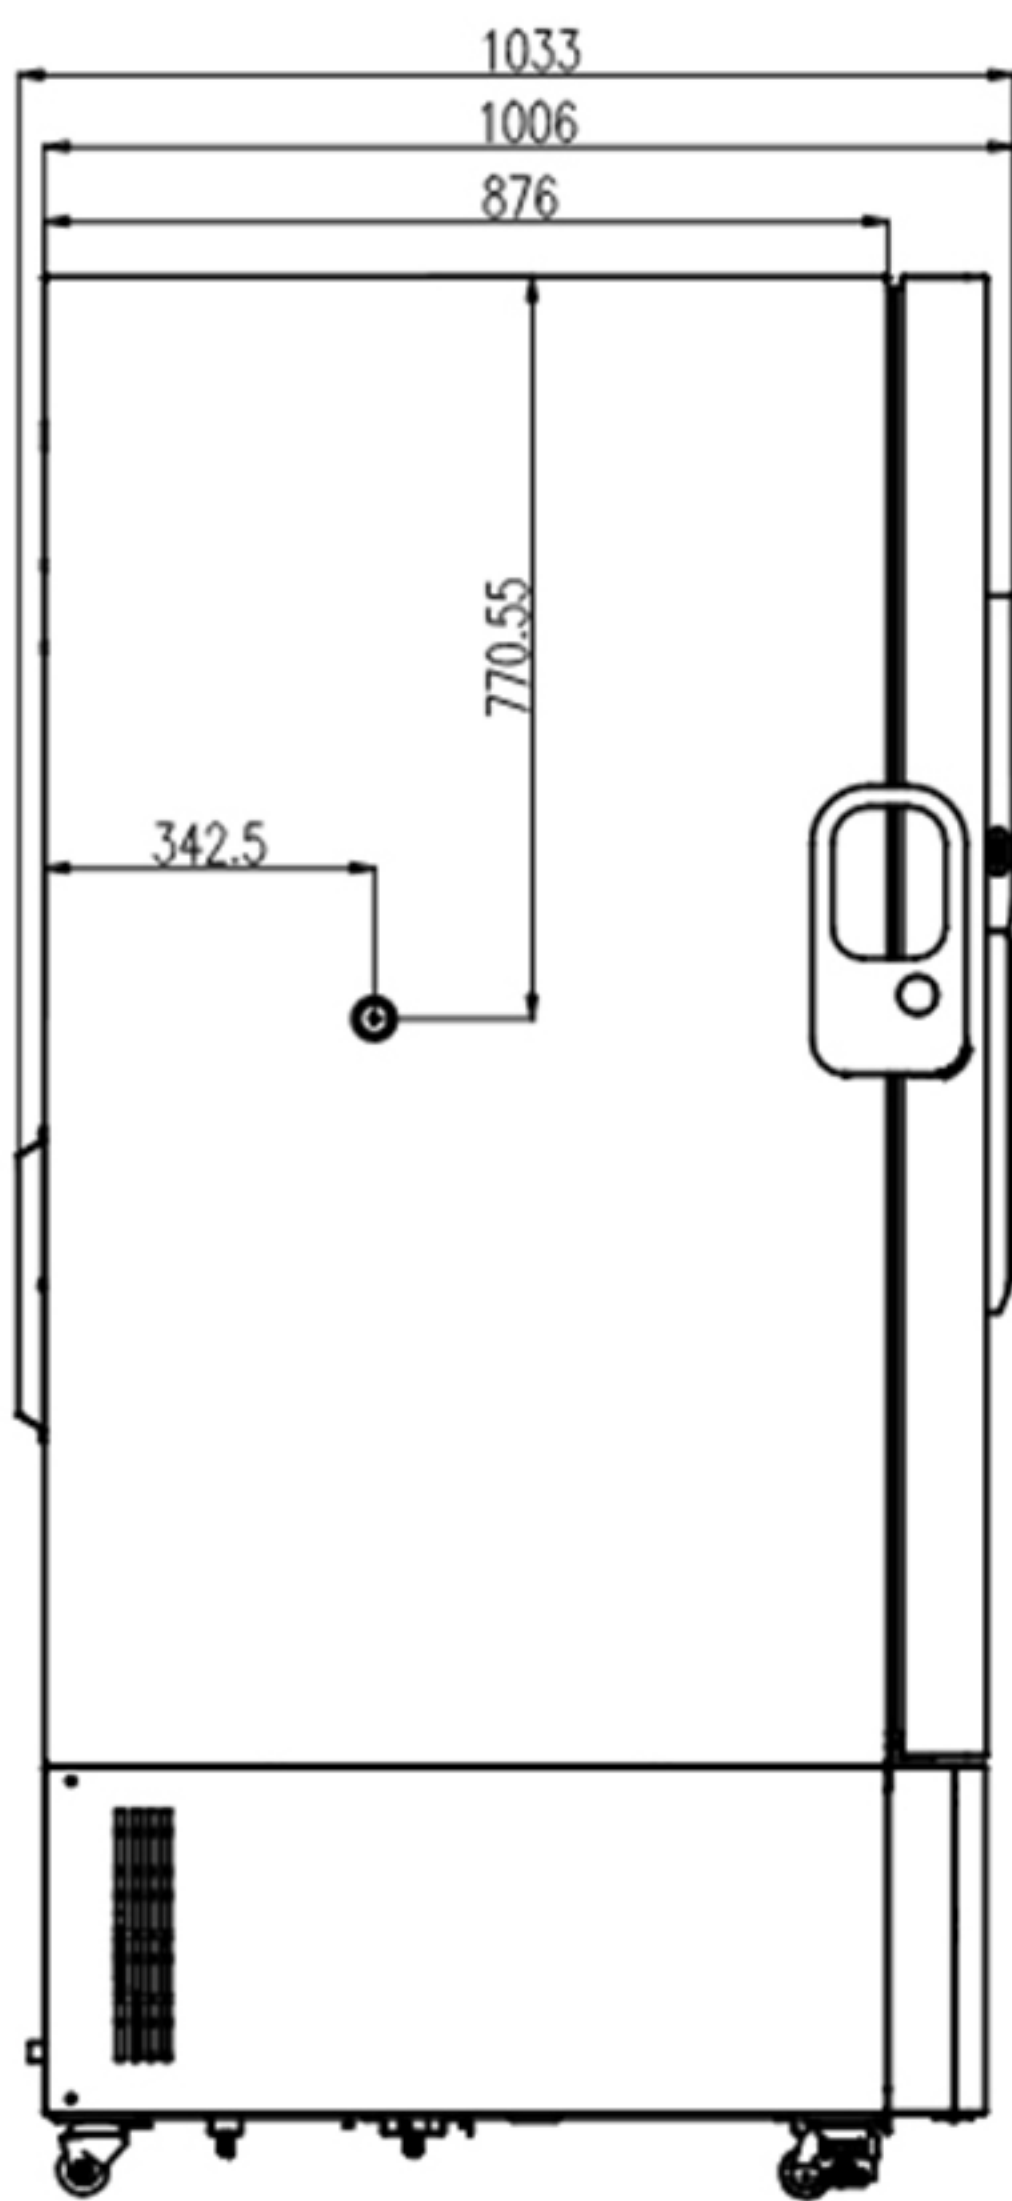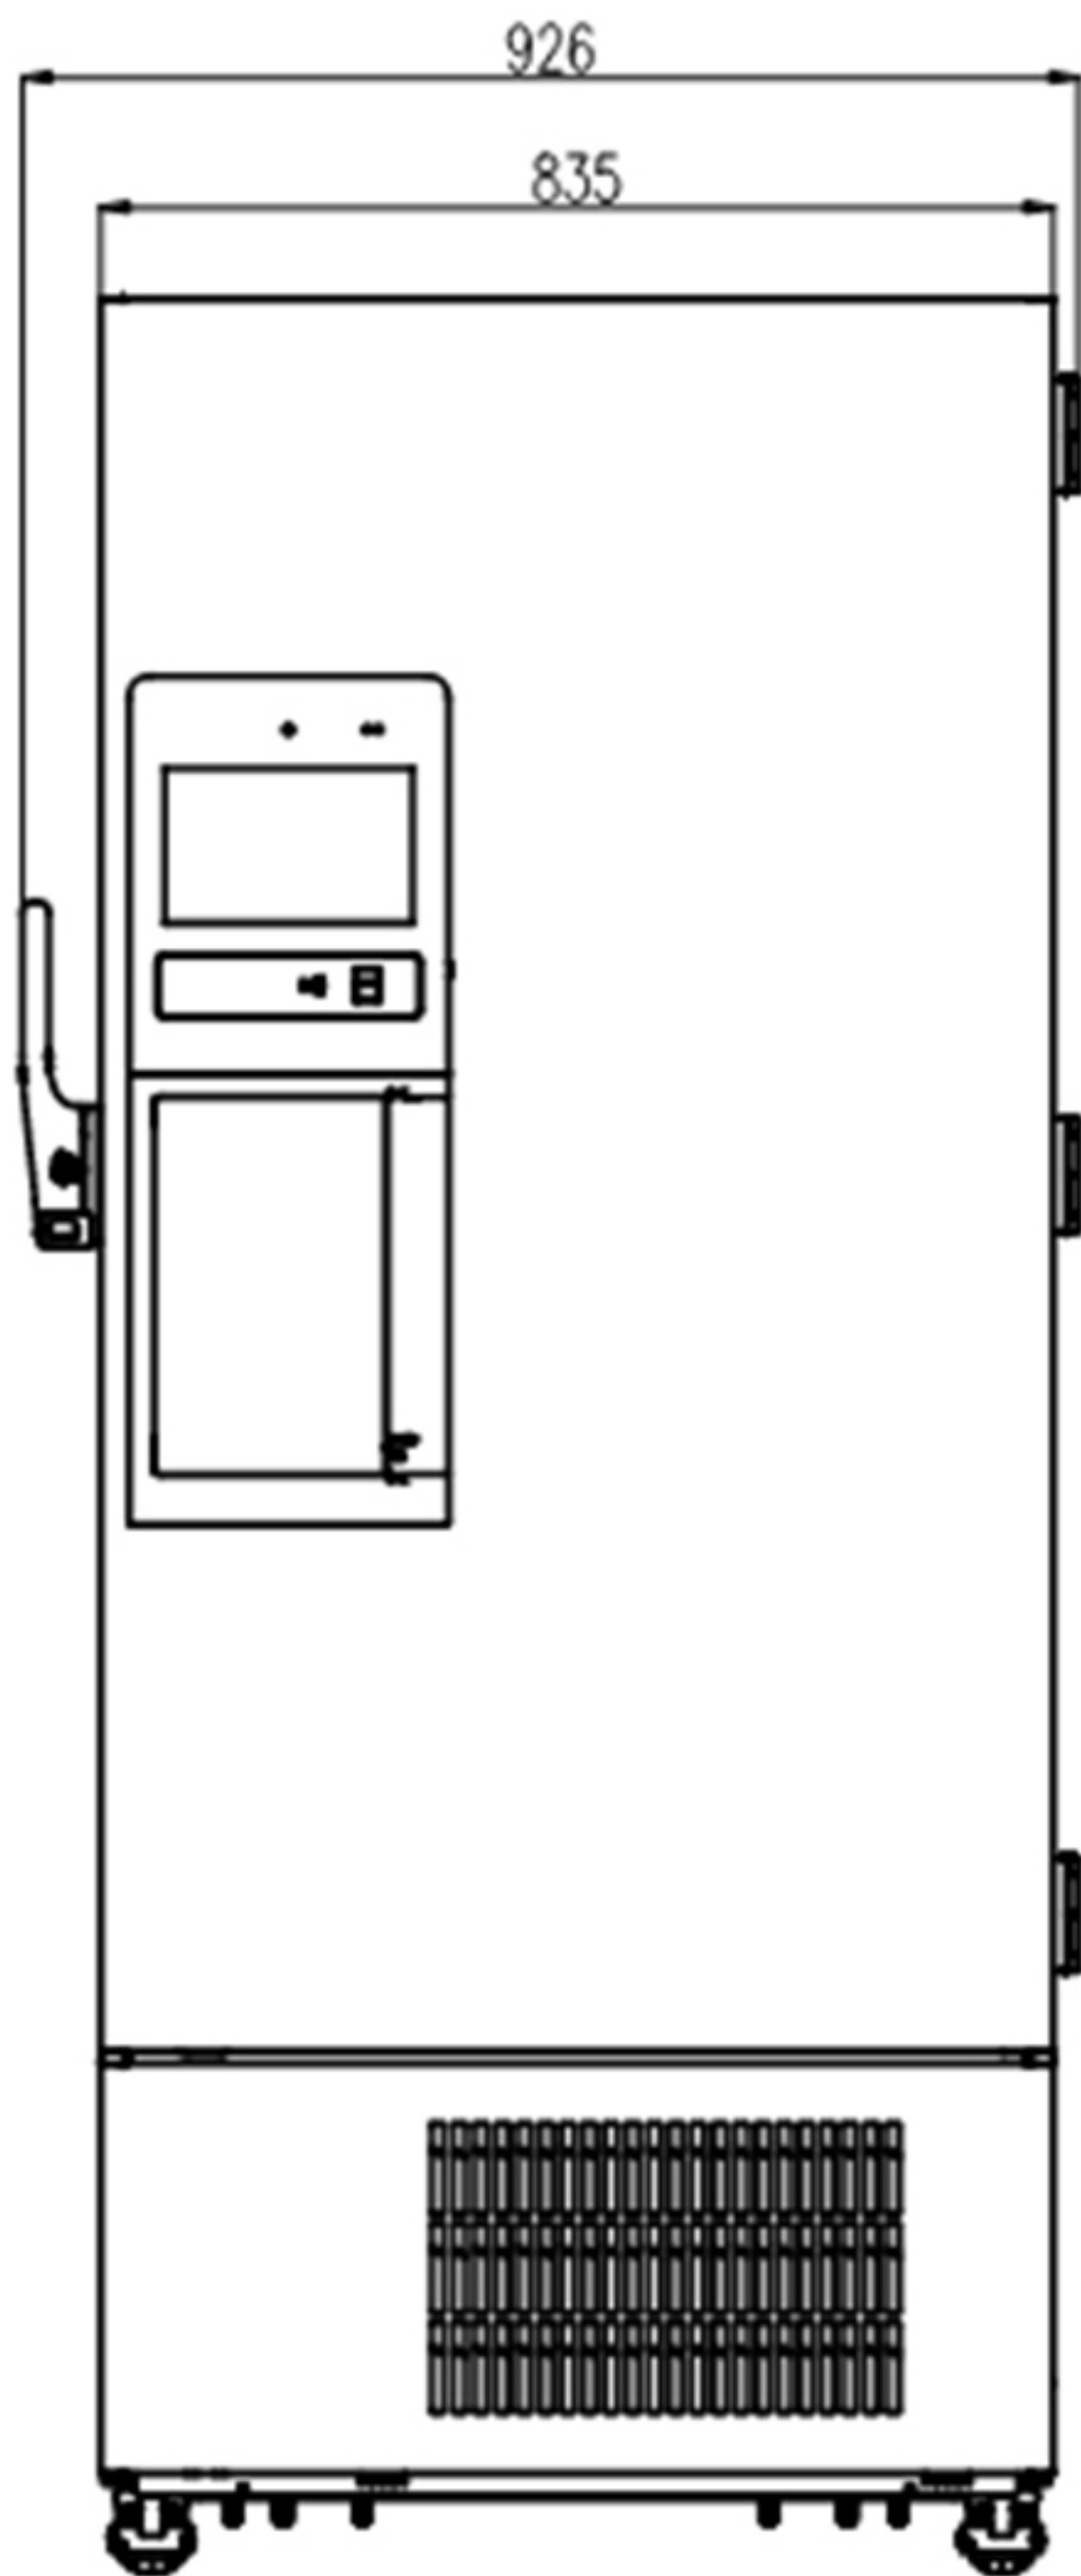

-86°C Ultra-low Temperature Freezer	
Model	DW-HL578T
Capacity	578L
Internal size (W*D*H) mm/Inch	615*712*1290
External size (W*D*H) mm/Inch	926*1031*1994
Package size (W*D*H) mm/Inch	1168*1020*2141
NW(kgs)	294
Performance	
Temperature range	-40~-86°C
Ambient temperature	16~32°C
Cooling performance	-86°C
Climate class	N
Controller	Microprocessor
Display	10" HD Intelligent touch screen
Refrigeration	
Compressors	2pcs
Cooling method	Direct cooling
Defrost mode	Manual
Refrigerants	HC
Insulation thickness(mm)	D:104,L/R: 110, B: 110
Construction	
External material	Cold rolled steel
Inner material	Stainless steel
Shelves	3(stainless steel)
Access test Port	2pcs. Ø 25 mm
Castors	4+(2 leveling feet)
Data logging/ Interval /Memory capacity	USB/Record every 5 minutes/10 years
Interface	Remote alarm contact, RS485,IoT,WIFI, 5V power interface, Network port
Backup battery	Yes
Alarms	
Temperature	High/Low temperature, High ambient temperature, Condenser high temperature alarm
Electrical	Power failure, Low battery, Battery power detection failure
System	Data communication failure, Door ajar, Ambient temperature sensor failure, Condenser sensor failure, Temperature sensor failure
Electrical Data	
Power supply(V/HZ)	220V;50Hz
Rated current (A)	9.14A