



Lila-LAB GmbH
Am Eichenhain 2 – D-31552 Rodenberg
Tel. 05723 / 74 96 14
info@lila-lab.de

Midea Biomedical
Midea Biomedical, Hefei City, China
www.mideabiomedical.net

Midea MC-5L126

+5°C Premium Pharmazeutischer Kühlschrank in der Untertisch-Variante inklusive Glastür




- 126 Liter mit geregelter Umluftkühlung
- DIN 13277 konform
- Mikroprozessor gesteuertes LED-Digitaldisplay
- Glastür
- LED-Innenlicht
- Umweltfreundliches Kältemittel (R600a) mit einem sehr geringen Energieverbrauch
- Anzeige der Temperatur und Luftfeuchtigkeit
- Abschließbar
- Optische und Akustische Alarme für Temperaturabweichungen und andere Gerätezustände
- Sehr homogene Temperaturverteilung durch geregeltes Umluftkühlssystem ($\pm 2^{\circ}\text{C}$)
- Automatisches Abschalten bei öffnen der Fronttür
- Automatische Abtaufunktion mit Tauwasserverdunstung
- Sehr leise, lediglich 40 dB(A) für ein angenehmes Arbeiten
- Selbstschließende Tür
- Kabeldurchführung
- Potentialfreier Kontakt
- USB-Schnittstelle



Lila-LAB GmbH
Am Eichenhain 2 – D-31552 Rodenberg
Tel. 05723 / 74 96 14
info@lila-lab.de

Technisches Datenblatt
Midea Ultratiefkühlschrank
Model: MC-5L416

Application, Rating, & Electrical Data	
Application	Pharmacy refrigerator
Storage Volume (L)	126 (4.45 cu.ft)
Temperature Range	+2°C to +8°C
Default Set Point	+5°C
Power	115~V/60Hz 220-240~V/50Hz 220-240~V/60Hz
Current	2A 1A 1A
Power Cord Length	1.7m
Certification	CE/UL
Door type	LOW-E Glass/Electrically Heated Glass Door optional
Application Environment	Non-corrosive, non-flammable, non-explosive
Ambient Operating Temperature	+16°C to +32°C
Refrigeration	
Refrigeration System	Forced-air/hydrocarbon Refrigerant
Compressor	Hermetic
Condenser Type	Air-cooled
Expansion Device	Cap tube
Evaporator Type	Fin and tube
Defrost Method	Automatic
Refrigerant	R600a
Controller / Configuration Settings	
Display screen	LED
Controller Type	Microprocessor
Security	Lockable door, protected settings
Control Sensor	RTD, stainless steel
Communication Ports	USB, Remote alarm contacts
Power Failure Alarm	Yes
High/Low Alarms	Yes, fully adjustable
Door Ajar Alarm	Yes, fully adjustable
Min/Max Temperature	Yes, display and reset
Download	Yes, via USB, PDF
Temperature Log	Yes, download via USB
Temperature Monitoring Ballast	Yes
Battery Back-up	Yes, 20 hr (built-in cell battery)
Dimensions	
Interior (w x h x d)mm	505*467*620 mm
Exterior (w x h x d)	595*615*810 mm
Access Port	Access Port- for external monitoring probe(s) (25 mm diameter)
Shelf	3 35 kg max capacity/shelf
Wheels	leveling feet
Net Weight	43 kg
Gross Weight	48 kg



Location of test probes


Typical Temperature Map

	test1	test2	test3	test4	test5	test6	test7	test8	test9
Avg	4.88	5.24	5.15	4.13	4.32	4.92	4.71	4.78	5.37
Max	5.30	5.60	5.50	4.80	4.70	5.20	5.00	5.10	5.70
Min	4.40	4.90	4.70	3.50	4.00	4.60	4.40	4.40	5.10

Performance Characteristics (normal operating conditions)	
Uniformity (°C)	±1.0
Recovery to 8°C after 1 min door opening (min)	9
Temperature fluctuation (°C)	< 2
Energy consumption (kWh/day)	CE/0.78 UL/1.2
Noise emission (dB)	45
Heat rejection (BTU/hr)	634
Pull-down time to 6°C (min)	80

All performance data from 126L refrigerator, 25 ambient, 5.0°C

Uniformity

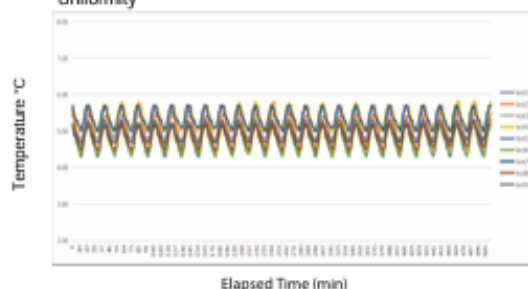

Cooling Speed

