



Lila-LAB GmbH
Am Eichenhain 2 – D-31552 Rodenberg
Tel. 05723 / 74 96 14
info@lila-lab.de

Haier Biomedical
Intelligent Protection of Life Science


Haier HYC-118A

+5°C Pharmazeutischer Kühlschrank als Untertisch-Version Inklusive Glastür




- 118 Liter mit geregelter Umluftkühlung
- Mikroprozessor gesteuertes Digitaldisplay
- Glastür
- LED-Innenlicht
- Umweltfreundliches Kältemittel (R600a) mit einem sehr geringen Energieverbrauch
- Anzeige der Temperatur und der Gerätezustände
- Abschließbar
- Optische und Akustische Alarme für Temperaturabweichungen und andere Gerätezustände
- Sehr homogene Temperaturverteilung durch geregeltes Umluftkühlsystem ($\pm 3^{\circ}\text{C}$)
- Automatisches Abschalten bei öffnen der Fronttür
- Automatische Abtaufunktion mit Tauwasserverdunstung
- Sehr leise, lediglich 41 dB(A) für ein angenehmes Arbeiten
- Selbstschließende Tür
- Kabeldurchführung
- Potentialfreier Kontakt

HYC-118A
Cooling down (ambient 32°C)

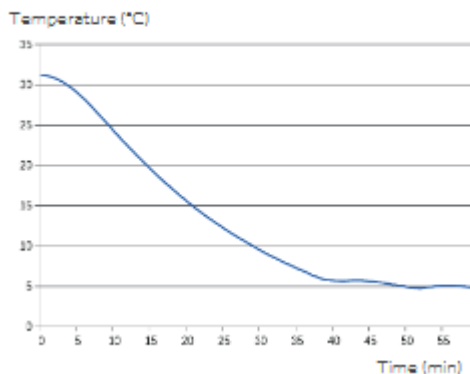

HYC-118A
Stability (ambient 25°C)

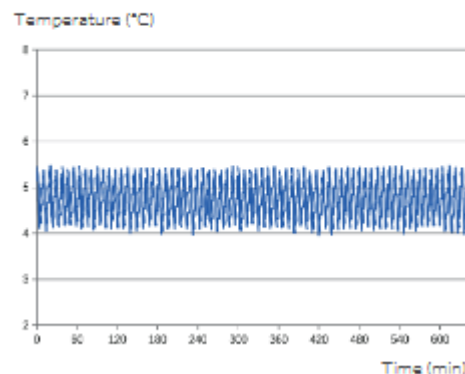



Lila-LAB GmbH
Am Eichenhain 2 – D-31552 Rodenberg
Tel. 05723 / 74 96 14
info@lila-lab.de

Technisches Datenblatt
Haier Biomedical Pharmazeutischer
Kühlschrank
Model: HYC-118A

Model		HYC-118A	
Technical Data	Cabinet Type	Upright, Glass Door	
	Climate Class	N	
	Cooling Type	Forced Air Cooling	
	Defrost Mode	Auto	
	Refrigerant	R600a	
	GWP (global warming potential)	20	
	Sound Level (dB(A))	41	
Performance	Temperature Range (°C)	2-8	
Control	Will the fan stop automatically when opening the door	Y	
	Controller	Microprocessor	
	Display	LED	
Electrical Data	Power Supply (V/Hz)	220-240/50/60	115/60
	Electrical Current (A)	1.5	
Performance Characteristics	Temperature Sensor	NTC	
	Power Consumption (kWh/24h)	1.7	1.94
	Temperature Sensor or Not	Y	
Dimensions	Capacity (L/Cu.Ft)	118/4.2	
	Net/Gross Weight (approx)	(kg)	46/51
		(lbs)	101.5/112.5
	Interior Dimension (W*D*H)	(mm)	515*415*630
		(in)	20.3*16.3*24.8
	Exterior Dimension (W*D*H)	(mm)	597*635*810
		(in)	23.5*25.0*31.9
	Packing Dimension (W*D*H)	(mm)	700*710*930
		(in)	27.6*28.0*36.6
Alarms	Container Load (20'/40'/40'H)	48/96/96	
	High/Low Temperature	Y	
	Remote Alarm	Y	
	Power Failure	Y	
	Sensor Error	Y	
	Low Battery	Y	
	Audible and Visual Alarm	Y	
	Door Ajar	Y	
Accessories	Foot	Y/2	
	Porthole	Y; Left Side Wall	
	Shelves/Drawers	3/1	
	USB Interface	/	
	Exterior Material	Painted Steel	
Material	Interior Material	Polystyrene	
	Drawers Material	Steel Wire Dipping Plastic	
	Door Thickness (mm)	40	
	Cabinet Thickness (mm)	40	
	Shelves Material	Steel Wire, Coated with Plastic	
	No. of Shelves	3	
Other	Certificate	CE,UKCA	UL