



Lila-LAB GmbH
Am Eichenhain 2 – D-31552 Rodenberg
Tel. 05723 / 74 96 14
info@lila-lab.de

Haier Biomedical
Intelligent Protection of Life Science


Haier HYC-390

+5°C Pharmazeutischer Kühlschrank Inklusive Glastür. 390 Liter mit geregelter Umluftkühlung




- Mikroprozessor gesteuertes Digitaldisplay
- Glastür
- LED-Innenlicht
- Umweltfreundliches Kältemittel (R600a) mit einem sehr geringen Energieverbrauch
- Anzeige der Temperatur und der Gerätezustände
- Abschließbar
- Optische und Akustische Alarme für Temperaturabweichungen und andere Gerätezustände
- Sehr homogene Temperaturverteilung durch geregeltes Umluftkühlsystem ($\pm 2^{\circ}\text{C}$)
- Automatisches Abschalten bei öffnen der Fronttür
- Automatische Abtaufunktion mit Tauwasserverdunstung
- Sehr leise, lediglich 43 dB(A) für ein angenehmes Arbeiten
- Selbstschließende Tür
- Kabeldurchführung
- Potentialfreier Kontakt

HYC-390 Warm up test at 25°C ambient

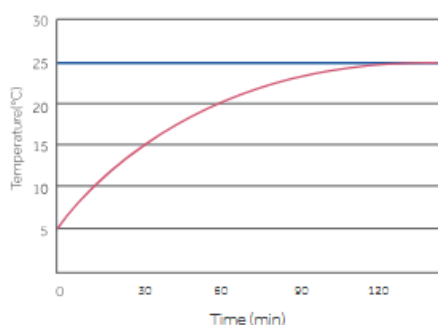

HYC-390 Pull down test at 25°C ambient

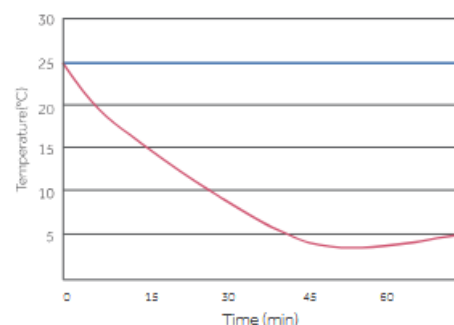



Lila-LAB GmbH
Am Eichenhain 2 – D-31552 Rodenberg
Tel. 05723 / 74 96 14
info@lila-lab.de

Haier Biomedical
Intelligent Protection of Life Science

Technisches Datenblatt
Haier Biomedical Pharmazeutischer
Kühlschrank
Model: HYC-390

Model		HYC-390	
Technical Data	Cabinet Type	Upright, Single Door	
	Climate Class	N	
	Cooling Type	Forced Air Cooling	
	Defrost Mode	Auto	
	Refrigerant	R600a	
	GWP (global warming potential)	20	
	Sound Level (dB(A))	43	
Performance	Temperature Range (°C)	2-8	
Control	Will the fan stop automatically when opening the door	Y	
	Controller	Microprocessor	
	Display	LED	
Electrical Data	Power Supply (V/Hz)	220-240/50/60	115/60
	Electrical Current (A)	1.8	2.4
Performance Characteristics	Temperature Sensor	Digital Sensor	
	Power Consumption (kWh/24h)	43	
Dimensions	Capacity (L/Cu.Ft)	390/13.8	
	Net/Gross Weight (approx)	(kg)	116/139
		(lbs)	255.8/306.6
	Interior Dimension (W*D*H)	(mm)	530*555*1380
		(in)	20.9*21.9*54.3
	Exterior Dimension (W*D*H)	(mm)	665*710*1965
		(in)	26.2*28.0*77.4
	Packing Dimension (W*D*H)	(mm)	710*810*2130
		(in)	27.6*31.9*83.9
Alarms	Container Load (20'/40'/40'H)	22/44/44	
	High/Low Temperature	Y	
	Remote Alarm	Y	
	Power Failure	Y	
	Sensor Error	Y	
	Low Battery	Y	
	Door Ajar	Y	
	Audible and Visual Alarm	Y	
Accessories	Caster	Y	
	Foot	Y	
	Porthole	Y	
	Shelves/Drawers	7/-	
	USB Interface	Optional	Y
	Printer	Optional	
Material	Exterior Material	Painted Steel	
	Interior Material	Polystyrene	
	Door Thickness (mm)	40	
	Cabinet Thickness (mm)	40	
	Shelves Material	Steel Wire, Coated with Plastic	
	No. of Shelves	7	
Other	Certificate	CE	UL