



Lila-LAB GmbH
Am Eichenhain 2 – D-31552 Rodenberg
Tel. 05723 / 74 96 14
info@lila-lab.de

Haier Biomedical
Intelligent Protection of Life Science


Haier HYC-410

+5°C Pharmazeutischer Kühlschrank Inklusive Glastür. 410 Liter mit geregelter Umluftkühlung




- Mikroprozessor gesteuertes Digitaldisplay
- Glastür
- LED-Innenlicht
- Umweltfreundliches Kältemittel (R600a) mit einem sehr geringen Energieverbrauch
- Anzeige der Temperatur und der Gerätezustände
- Abschließbar
- Optische und Akustische Alarme für Temperaturabweichungen und andere Gerätezustände
- Sehr homogene Temperaturverteilung durch geregeltes Umluftkühlsystem ($\pm 2^{\circ}\text{C}$)
- Automatisches Abschalten bei öffnen der Fronttür
- Automatische Abtaufunktion mit Tauwasserverdunstung
- Sehr leise, lediglich 41 dB(A) für ein angenehmes Arbeiten
- Selbstschließende Tür
- Kabeldurchführung
- Potentialfreier Kontakt

HYC-410
Cooling down (ambient 32°C)

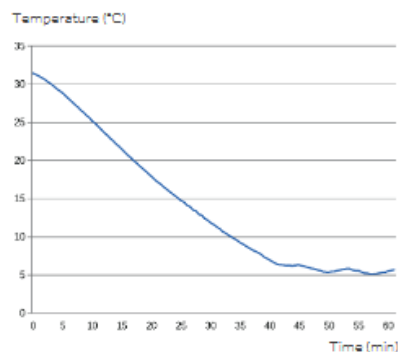

HYC-410
Stability (ambient 25°C)

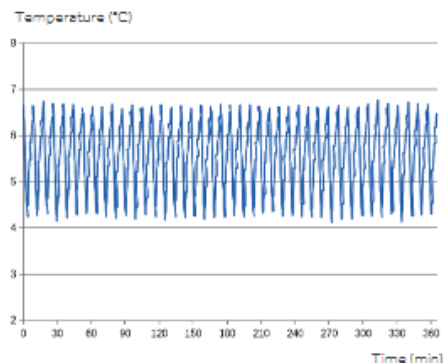



Lila-LAB GmbH
Am Eichenhain 2 – D-31552 Rodenberg
Tel. 05723 / 74 96 14
info@lila-lab.de

Haier Biomedical
Intelligent Protection of Life Science

Technisches Datenblatt
Haier Biomedical Pharmazeutischer
Kühlschrank
Model: HYC-410

Model			HYC-410
Technical Data	Cabinet Type		Upright, Single Door
	Climate Class		N
	Cooling Type		Forced Air Cooling
	Defrost Mode		Auto
	Refrigerant		R600a
	GWP (global warming potential)		20
	Sound Level (dB(A))		41
Performance	Temperature Range (°C)		2-8
Control	Will the fan stop automatically when opening the door		Y
	Controller		Microprocessor
	Display		LED
Electrical Data	Power Supply (V/Hz)		220-240/50
	Electrical Current (A)		2.0
Performance Characteristics	Temperature Sensor		NTC
	Power Consumption (kWh/24h)		5.5
Dimensions	Capacity (L/Cu.Ft)		410/14.5
	Net/Gross Weight (approx)	(kg)	116/139
		(lbs)	255.7/306.4
	Interior Dimension (W*D*H)	(mm)	530*590*1380
		(in)	20.9*22.8*54.3
	Exterior Dimension (W*D*H)	(mm)	665*710*1965
		(in)	26.2*28.0*77.4
	Packing Dimension (W*D*H)	(mm)	710*810*2130
		(in)	27.6*31.9*83.9
Container Load (20'/40'/40'H)		22/44/44	
Alarms	High/Low Temperature		Y
	Remote Alarm		Y
	Power Failure		Y
	Sensor Error		Y
	Low Battery		Y
	Door Ajar		Y
	Audible and Visual Alarm		Y
Accessories	Caster		4
	Foot		2
	Porthole		Y
	Shelves/Drawers		6 /-
	USB Interface		Optional
	Printer		Optional
Material	Exterior Material		Painted Steel
	Interior Material		Polystyrene
	Door Thickness (mm)		45
	Cabinet Thickness (mm)		40
	Shelves Material		Steel Wire, Coated with Plastic
	No. of Shelves		6
Other	Certificate		CE, ENERGY STAR